



APPLICATION

Series K3-GI-SRF & SCRF provides protection for air openings against factors such as rain and wind.

FEATURED STANDARD CONSTRUCTION

•Frame:

- Galvanized Steel Formed Frame, 75mm (3") Depth, Channel Type Frame
- 20Ga thick frame for size up to 40"x40".
- 16Ga thick frame for size above 40"x40".

Model SCRF(Standard).

With 1" Flanged Frame SRF Model (Optional).

•Blades:

- Galvanized Steel Formed Blades, 20Ga Thick

•Blades Centers:



60mm (2-1/2") Maximum Centers At Head And Sills,
Corrosion Resistant Steel Fastners Used At Assembly

•Finish:

- Mill finish.
- All RAL Color (Optional)

•Sizes:

- Minimum Sizes: 8"x 8"
- Maximum Sizes: 70"x90" or 90"x70"
- Multiple Section : Unlimited

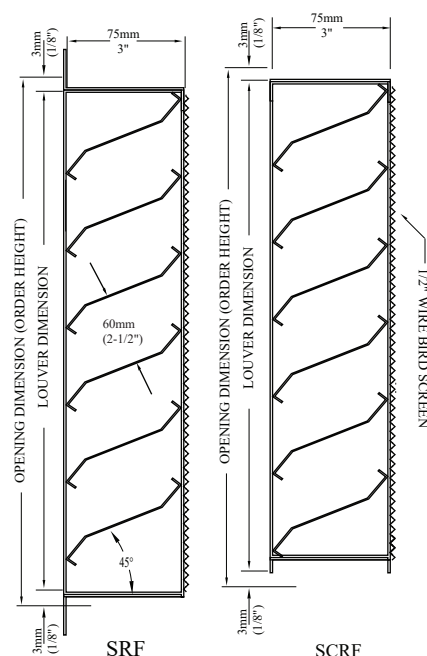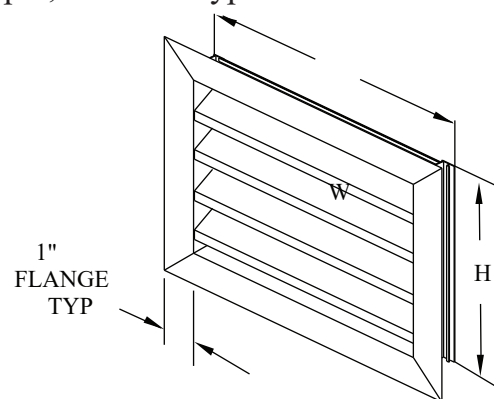

OPTIONS

- Construction : Stainless Steel 304 Or 316 (K3-SS-SRF Or SCRF)
- Construction : Non Standard Frame Thickness.
- Construction : Non Standard Blades Thickness.
- Screen: Bird Screen (Aluminum, Stainless or Galvanized)
- Insect Screen: (Aluminum , Stainless or Galvanized)