

LOUVERS

MODEL K6-DL series

DRAINABLE BLADE LOUVER

APPLICATION

Designed with a drainable sill and drainable blades to protect air intake and exhaust openings in building exteriors by minimizing water penetration.

Water is carried off by an integral gutter in the blade which is channeled through an integral downspout in the jamb, the water is then routed back onto the louver sill and out the front of the louver which in most conditions eliminates the need for a subsill or flashing.

STANDARD CONSTRUCTION

FRAME

Extruded aluminum 2.0mm (⁵/₆₄" nominal wall thickness & 151mm (6") depth.

BLADES

Extruded aluminum 2.0mm (⁵/₆₄" nominal wall thickness.

BLADE CENTERS:

110 mm (4³/₈") maximum centers at head and sills.
Corrosion resistant steel fasteners used at assembly.

FLANGE:

30 mm flange can be added (K6-DLF model) (optional)

SCREEN:


- Galvanized bird screen (standard)
- Aluminum bird screen
- Stainless steel bird screen
- Galvanized insect screen
- Aluminum insect screen
- Stainless steel insect screen

FINISH:

- Mill Finish (standard)
- Anodize
- All RAL colors

SIZES:

- Minimum width: 10"
- Minimum height: 10"
- Maximum single section:
- Width 144" x Height 92"
- Width 92" x Height 144"
- Multiple section: Unlimited
- Maximum single section area: 13248 in²

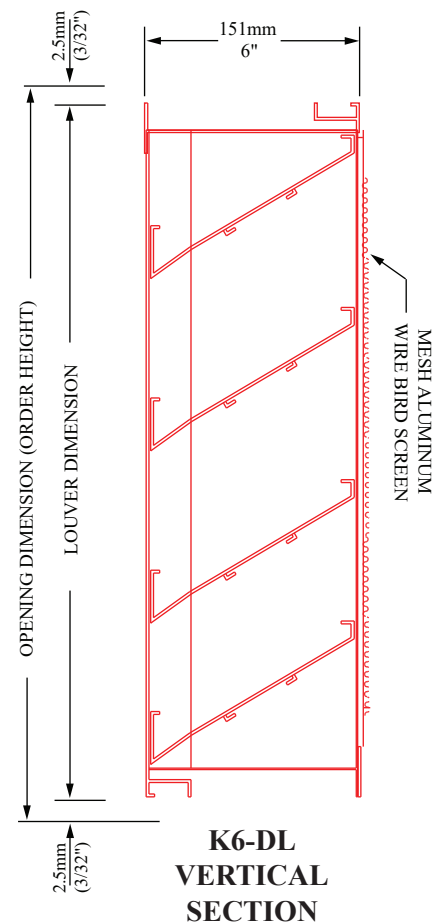





N.B: 5mm clearance is deducted from your order size.
For more information please consult our engineers.

LOUVERS

MODEL K6-DL series

DRAINABLE BLADE LOUVER

ILLUSTRATION

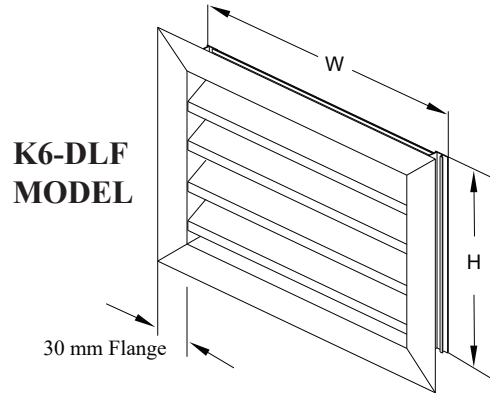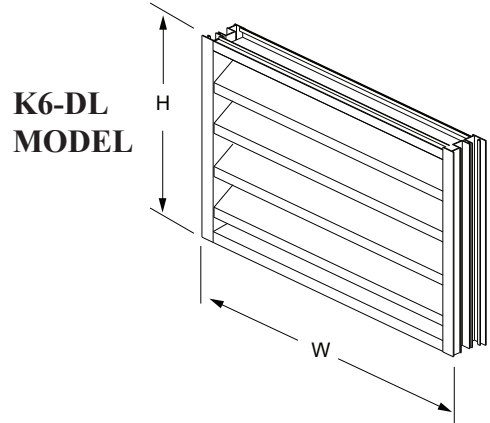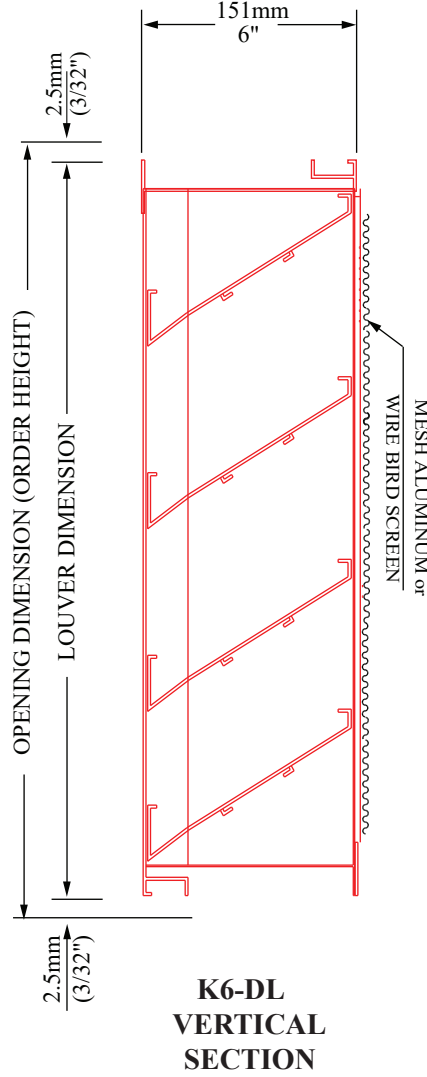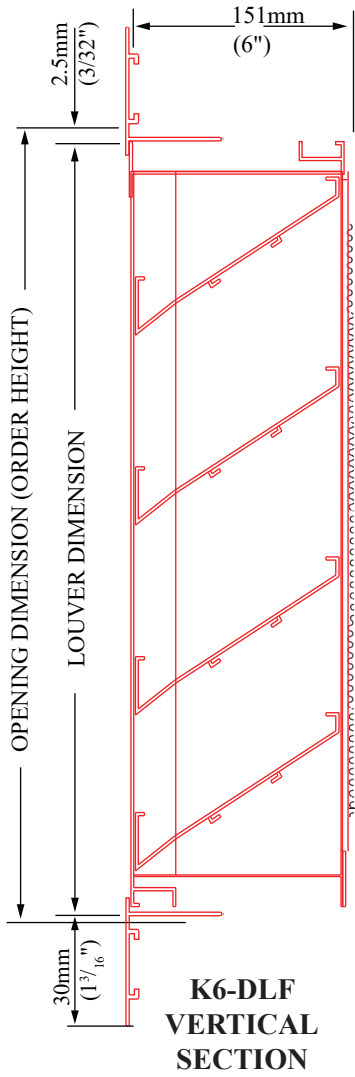

SINGLE SECTION LOUVER	MULTIPLE SECTION LOUVERS
<p style="text-align: center;">SECTION</p> <p style="text-align: center;">HIDDEN REINFORCEMENT BAR FOR WIDTH LARGER THAN 54"</p> <p style="text-align: center;">SINGLE SECTION LOUVER</p>	<p style="text-align: center;">OPENING DIMENSION (ORDER WIDTH)</p> <p style="text-align: center;">LOUVER DIM. LOUVER DIM.</p> <p style="text-align: center;">MULTIPLE SECTION LOUVERS MULTIPLE SECTION LOUVERS</p> <p style="text-align: center;">INTERLOCKING MULLIONS</p>




LOUVERS


MODEL K6-DL series

AIR PERFORMANCE

MODEL K6-DL series

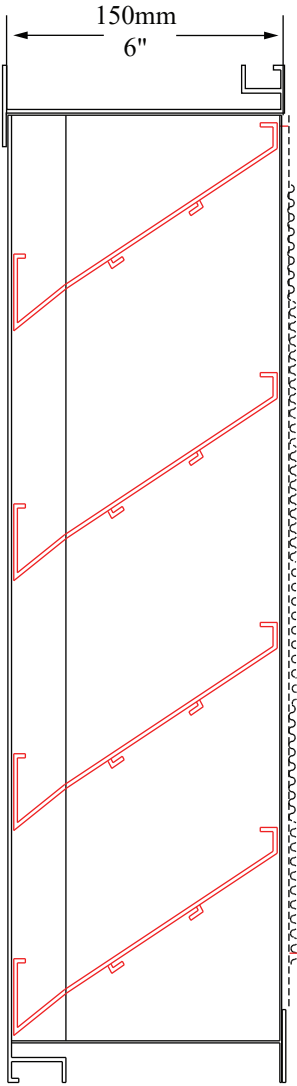

— Exhaust & Intake mode

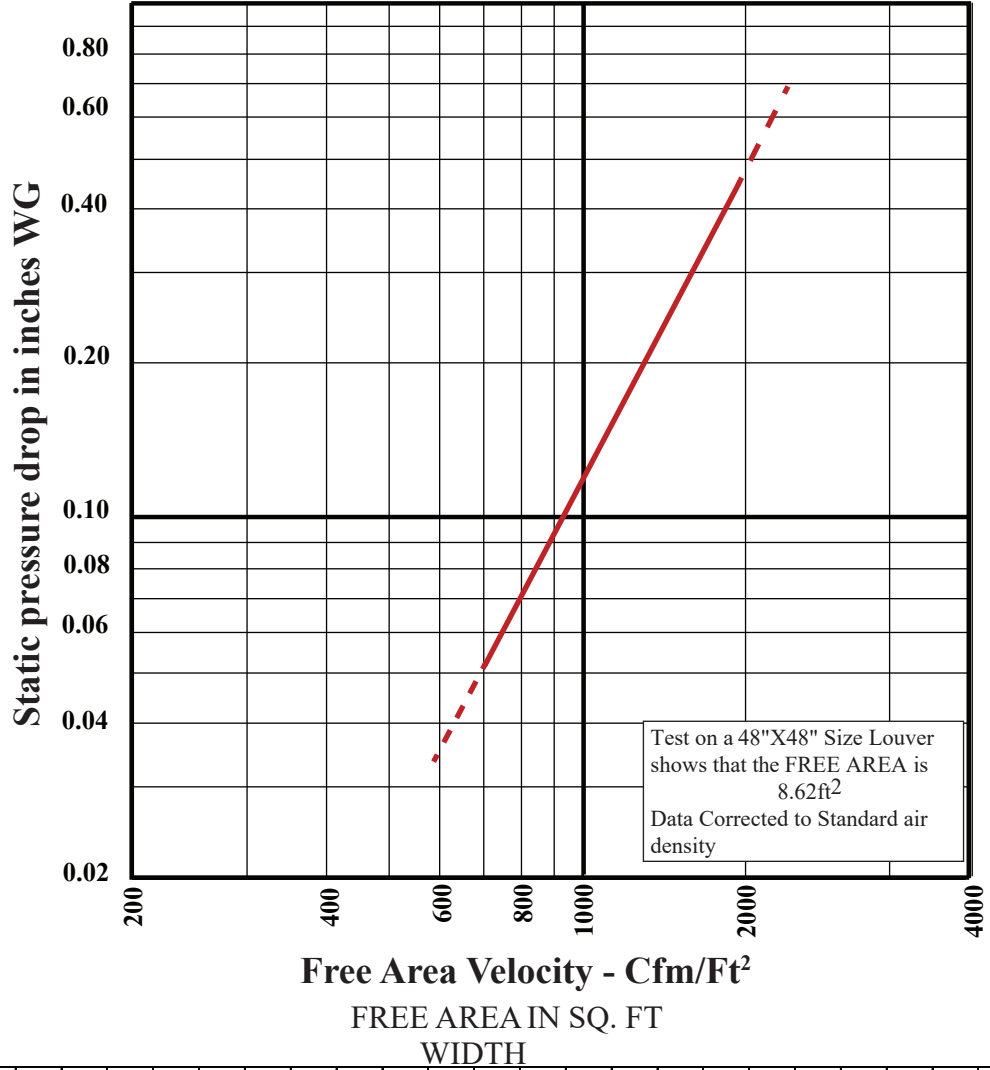

FREE AREA CALCULATIONS ARE BASED ON TEST UNITS WITHOUT BIRD SCREEN
TEST CONDUCTED According to AMCA-500-L Fig 5.5

HEIGHT



Inch	12	18	24	30	36	42	48	54	60	66	72	78	84	90	92	96	102	108	114	120	126	132	138	144
12	0.26	0.42	0.58	0.74	0.89	1.05	1.21	1.36	1.52	1.68	1.84	1.99	2.15	2.31	2.36	2.46	2.62	2.78	2.94	3.09	3.25	3.41	3.56	3.72
18	0.58	0.92	1.26	1.60	1.94	2.28	2.63	2.97	3.31	3.65	3.99	4.33	4.68	5.02	5.13	5.36	5.70	6.04	6.38	6.73	7.07	7.41	7.75	8.09
24	0.78	1.24	1.70	2.16	2.62	3.08	3.54	4.01	4.47	4.93	5.39	5.85	6.31	6.77	6.93	7.23	7.70	8.16	8.62	9.08	9.54	10.00	10.46	10.92
30	1.11	1.77	2.43	3.09	3.75	4.41	5.07	5.73	6.39	7.05	7.71	8.37	9.03	9.69	9.91	10.35	11.01	11.67	12.33	12.99	13.65	14.31	14.97	15.63
36	1.33	2.12	2.92	3.71	4.50	5.29	6.08	6.87	7.66	8.45	9.25	10.04	10.83	11.62	11.88	12.41	13.20	13.99	14.78	15.58	16.37	17.16	17.95	18.74
42	1.70	2.72	3.73	4.74	5.75	6.76	7.77	8.78	9.79	10.81	11.82	12.83	13.84	14.85	15.19	15.86	16.87	17.88	18.90	19.91	20.92	21.93	22.94	23.95
48	1.89	3.01	4.13	5.25	6.37	7.50	8.62	9.74	10.86	11.98	13.10	14.22	15.34	16.47	16.84	17.59	18.71	19.83	20.95	22.07	23.19	24.31	25.44	26.56
54	2.26	3.60	4.94	6.28	7.63	8.97	10.31	11.65	12.99	14.33	15.67	17.01	18.36	19.70	20.14	21.04	22.38	23.72	25.06	26.40	27.74	29.09	30.43	31.77
60	2.45	3.90	5.35	6.80	8.25	9.70	11.15	12.60	14.06	15.51	16.96	18.41	19.86	21.31	21.80	22.76	24.21	25.67	27.12	28.57	30.02	31.47	32.92	34.37
66	2.82	4.49	6.16	7.83	9.50	11.17	12.84	14.51	16.19	17.86	19.53	21.20	22.87	24.54	25.10	26.21	27.88	29.56	31.23	32.90	34.57	36.24	37.91	39.58
72	3.00	4.78	6.56	8.35	10.13	11.91	13.69	15.47	17.25	19.03	20.81	22.60	24.38	26.16	26.75	27.94	29.72	31.50	33.28	35.06	36.85	38.63	40.41	42.19
78	3.37	5.37	7.37	9.38	11.38	13.38	15.38	17.38	19.38	21.38	23.38	25.39	27.39	29.39	30.06	31.39	33.39	35.39	37.39	39.39	41.40	43.40	45.40	47.40
84	3.56	5.67	7.78	9.89	12.00	14.11	16.22	18.34	20.45	22.56	24.67	26.78	28.89	31.00	31.71	33.11	35.23	37.34	39.45	41.56	43.67	45.78	47.89	50.00
90	3.74	5.96	8.19	10.41	12.63	14.85	17.07	19.29	21.51	23.73	25.96	28.18	30.40	32.62	33.36	34.84	37.06	39.28	41.50	43.73	45.95	48.17	50.39	52.61
92	2.82	4.49	6.16	7.83	9.50	11.17	12.84	14.51	16.19	17.86	19.53	21.20	22.87	24.54	25.10	26.21	27.88	29.56	31.23	32.90	34.57	36.24	37.91	39.58
96	4.11	6.55	9.00	11.44	13.88	16.32	18.76	21.20	23.64	26.08	28.53	30.97	33.41	35.85	36.66									
102	4.30	6.85	9.40	11.95	14.50	17.06	19.61	22.16	24.71	27.26	29.81	32.36	34.91	37.47	38.32									
108	4.67	7.44	10.21	12.98	15.75	18.53	21.30	24.07	26.84	29.61	32.38	35.15	37.92	40.70	41.62									
114	4.85	7.74	10.62	13.50	16.38	19.26	22.14	25.02	27.90	30.79	33.67	36.55	39.43	42.31	43.27									
120	5.23	8.33	11.43	14.53	17.63	20.73	23.83	26.93	30.04	33.14	36.24	39.34	42.44	45.54	46.58									
126	5.41	8.62	11.83	15.04	18.26	21.47	24.68	27.89	31.10	34.31	37.52	40.73	43.95	47.16	48.23									
132	5.78	9.21	12.64	16.08	19.51	22.94	26.37	29.80	33.23	36.66	40.09	43.53	46.96	50.39	51.53									
138	5.97	9.51	13.05	16.59	20.13	23.67	27.21	30.76	34.30	37.84	41.38	44.92	48.46	52.00	53.18									
144	6.34	10.10	13.86	17.62	21.38	25.14	28.91	32.67	36.43	40.19	43.95	47.71	51.47	55.23	56.49									

**PERFORMANCE TESTING
IN ACCORDANCE WITH
AMCA 500-L Std.**

LOUVERS

MODEL K6-DL series

WATER PENETRATION

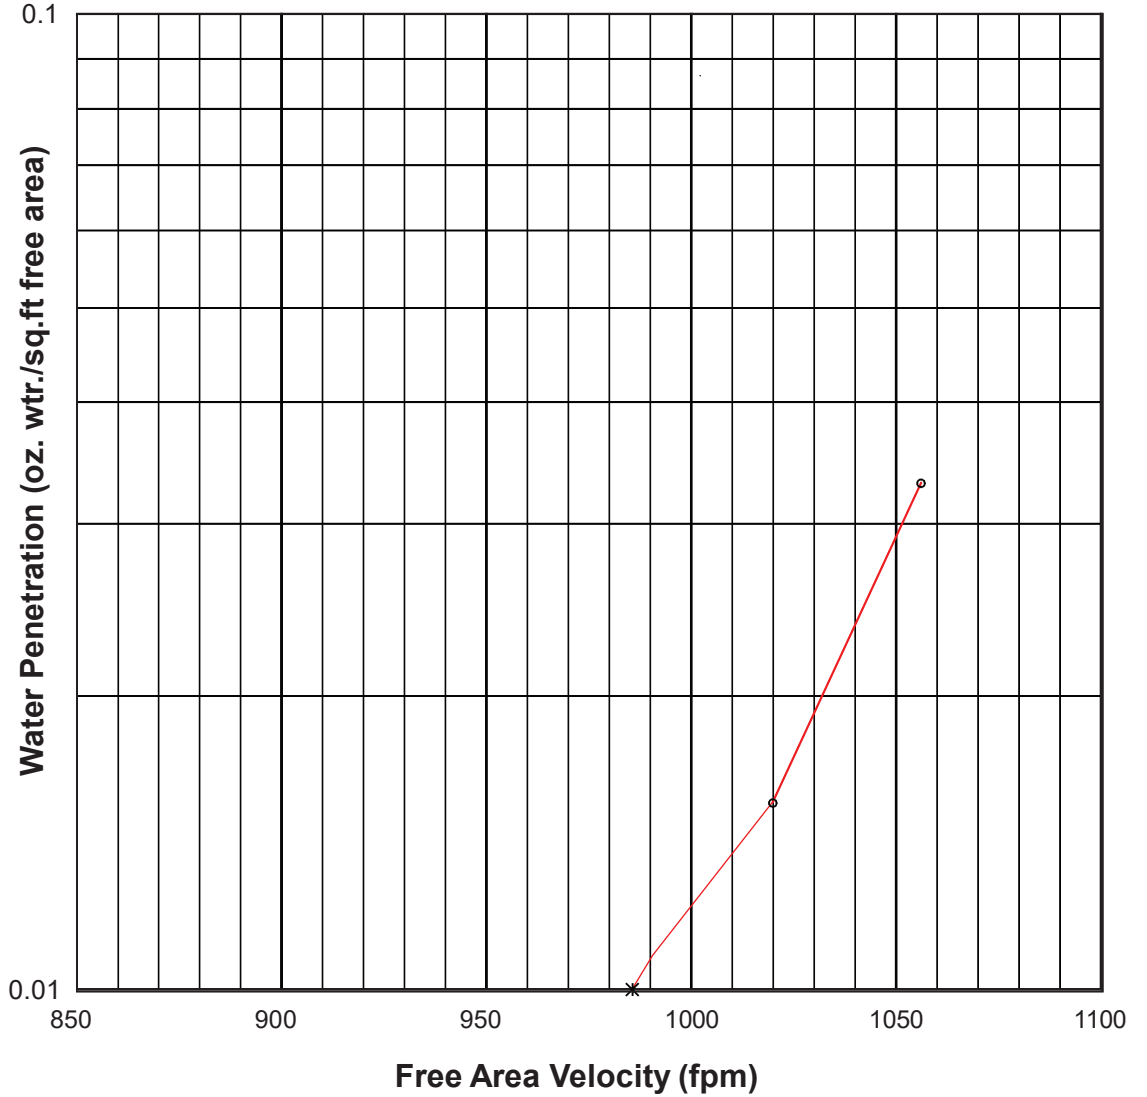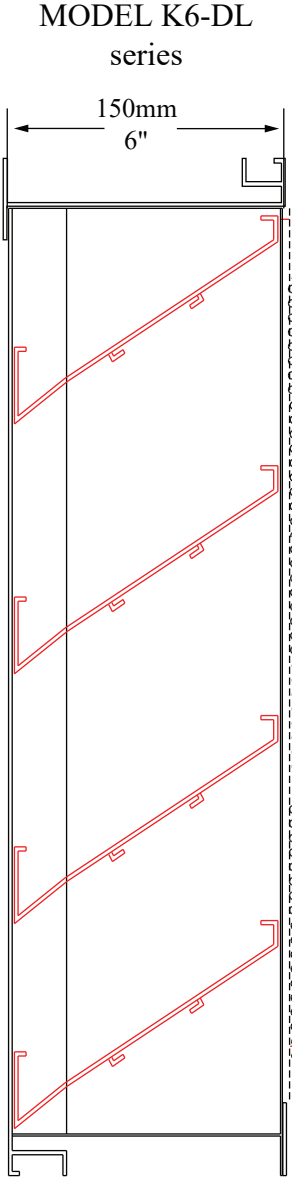

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The beginning point of water penetration is defined as that velocity where the water penetration curve projects through 0.01oz of water penetration per sq. ft. of louver free area.

Beginning of water penetration per AMCA Publication 511 Section 8.3.2 based on AMCA measured free area : 983.5 fpm


These performance ratings do not guarantee a louver to be weather-proof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louvers.

LOUVERS


MODEL K6-DL series

TYPICAL INSTALLATION DETAILS


MASONRY WALL INSTALLATION

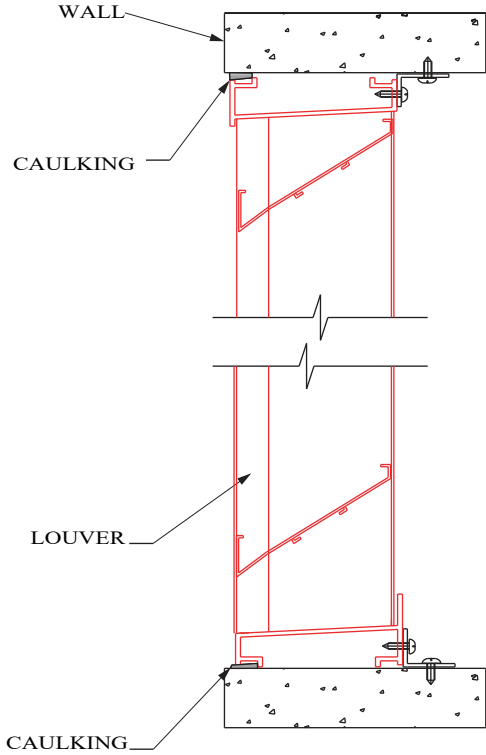

FLANGE MOUNT

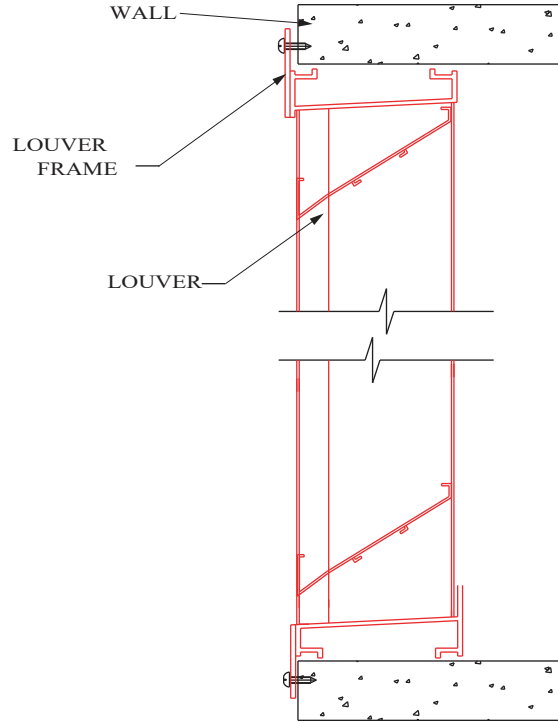

GLAZING FRAME INSTALLATION

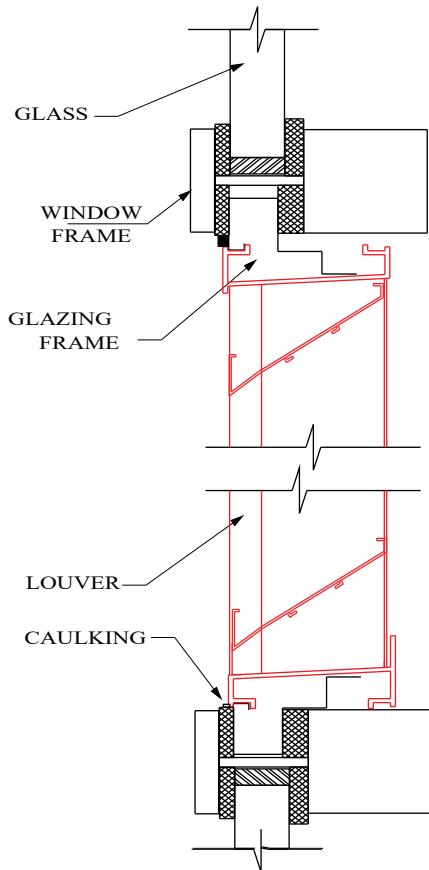

METAL PANEL INSTALLATION

